



Micro Vibrators

VBM Series

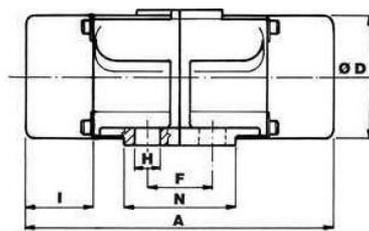

The VBM Series micro-vibrator is a small-scale vibratory feeder for applications requiring an extremely compact footprint. It is ideal for processing light products and fine materials in a wide range of industrial applications, such as cleaning, compacting, etc.

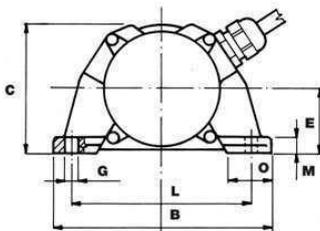

Features:

- Tropicalized motor
- Speed 3 000 rpm at 50 Hz and 3 600 rpm at 60 Hz
- Insulation class F
- Mechanical protection: IP65-7
- Stainless steel ground cover
- Single-phase version: with remote capacitor and 2-meter cable
- Three-phase version: with 1 meter cable
- Delivered wired, without plugs or bolts



Highlights:

- Super compact
- 2 power supply versions
- Single-phase version 220-230 V 50 Hz and 110-115 V 60 Hz
- Three-phase version 230 V or 400 V 50 Hz and 230 V or 460 V 60 Hz

Energy : Electric

Sectors : Building and construction, Industry, Prefabrication

Applications : Compaction, Conveying, Draining, Flow, Screening, Sieving, Sorting, Unclogging

Type	Input voltage (V)	Centrifugal Force (Kg)	Weight (Kg)	Input power (W)	Nom. Current (A)
VBM2M	230 V MONO	22	1.6	25	0.15
VBM2M	110 V MONO	22	1.6	25	0.30
VBM2T	400 V TRI	22	1.6	24	0.14
VBM2T	220 V TRI	22	1.6	24	0.24

Type	A	B	C	D	ØE	F	G	H	H	L	M	N	O
VBM2M	146	111	67	61	33	25-40	7	13	32	92	9	54	21
VBM2T	146	111	67	61	33	25-40	7	13	32	92	9	54	21

Dimensions : mm